


Hanging A Visual Display Cabinet

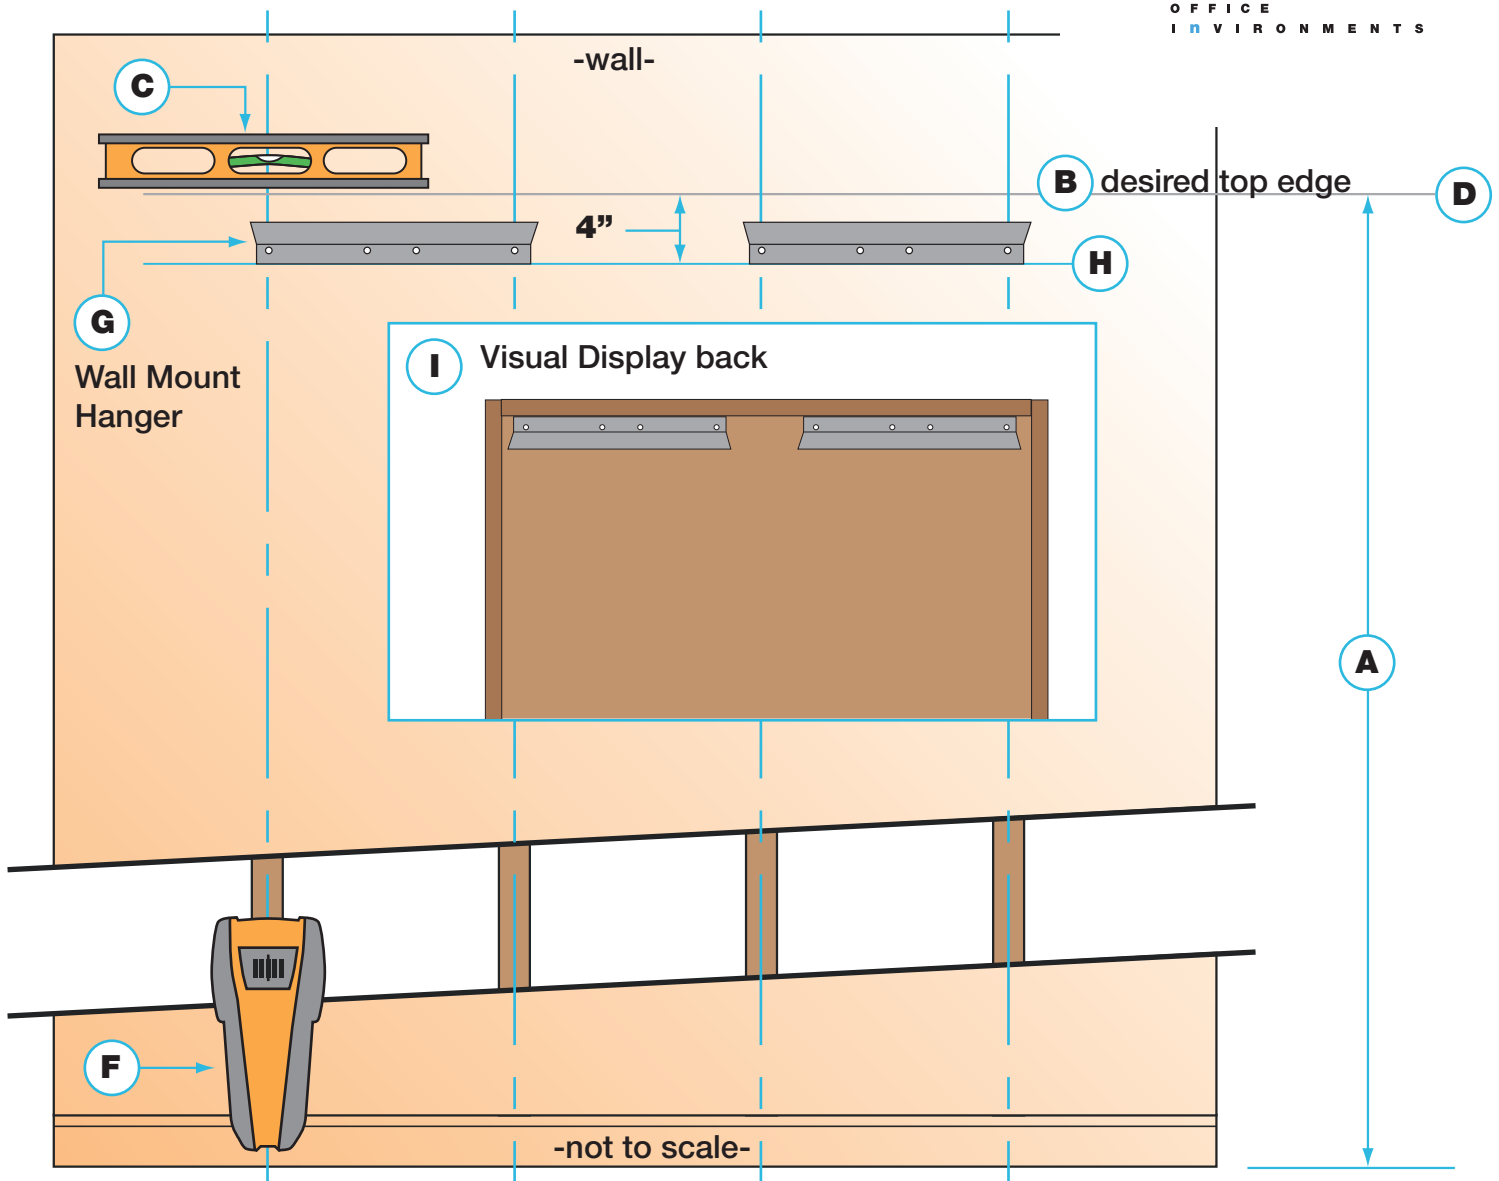

- 1) Take a tape measure (A) and measure from the floor up, to the height that you would like the top edge of the display cabinet to be (B).
- 2) Take a level (C) and draw a **LEVEL 42" Long line**, shown in (D) where you would like the unit hung.
- 3) Locate the mid point of the line (D), and using the tape measure, measure down 4" from the mid point. Using a pencil make a small mark at this point on the wall.
- 4) From this marked mid point on the wall, using the level, make a line (E) that is **parallel and level to line (D)**. **This line should extend 20" out from each end of the mid mark** that you made on the wall. This line (H) would thus be 40" long.
- 5) If you have a wall stud finder (F) use this (or some other means) to locate the studs in the wall that are located along this new line.

- 6) Take the wall mount hangers (shown by G), and mount these hangers level into the wall studs located along line (E). If these wall mount hangers are not level, your cabinet will not be level. This is shown in (H).

NOTE a visual display cabinet must be mounted to the wall studs. Mounting into drywall or any material other than the wall studs will not support the unit and voids all Inwood warranty and liability concerns.

- 7) Lifting up the entire Visual Display Cabinet, hold the top of the back side of the cabinet with the hangers installed (I) over the wall hanging mounts you have installed on the wall. Slide the Cabinet down until the brackets located on the back of the cabinet slide into the wall hung mounts.

Your Visual Cabinet is now mounted.